

1830 LUCERNE


«Medium» version in the round flush recessed raking light range.

APPLICATIONS:

- Highlight architectural features, street furniture, landscapes...
- Surface mounted lighting for cycle path, pedestrian path, stairs
- Squares and public places

CARACTERISTICS

- Anodised aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1830K and 1830D)
- Withstands occasional traffic from all kinds of vehicles (except 1830K)
- RGBW options available

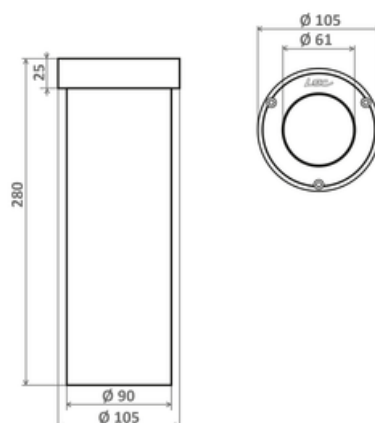

Number of LEDs	4
Type of LEDs	Power LEDs. Contact us for hot countries.

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1830-lucerne-r850>

APPLICATION

Outdoor lighting

Standard flux : **892 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

MOUNTING TYPE

- Ground flush recessed fittings
- Ground recessed fittings
- Pavements sides

CARACTERISTICS

Weight : **415 g**

Options of luminous effects

- RGBW option
- 20° deflected beam (option)
- Adjustable on 1 axis
- Beam with various openings
- Frosted dome (optional)
- Colour control system (optional)

Power supply - Control

Cable length: **1 m**

Material

- AL Anodised glazed aluminium
- PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

- Withstands random all vehicles traffic
- IK10 60J** Resists impacts up to 60 joules (IK10)
- IP68** Tight for extended immersion

1830 LUCERNE

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/1830-lucerne-r850>

