

5640 SCHOOL-LIGHT

Spotlight recessed into custom-made stainless steel handrail Wide choice of lenses:


- Very extensive asymmetric versions to ensure beam uniformity with intervals of up to 7m.
- Tilted beam to have tilted output even when the product is installed vertically to hide the light source.

APPLICATIONS:

- Handrails
- Cycle paths and pedestrian paths lighting
- Roadway lighting

CARACTERISTICS

- Colourless anodised machined aluminium
- Vandalproof organic glass window
- Flush-recessed
- 316L Stainless steel handrail available on request (Ø48mm or 76mm). Other sizes are available on a made-to-measure basis
- RGB options available

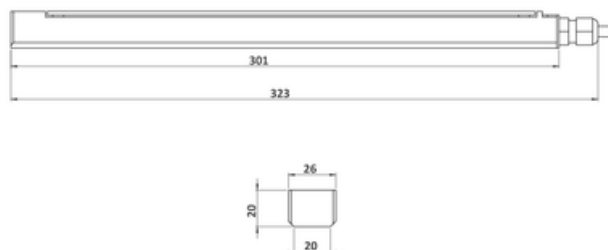

Number of LEDs	6
Type of LEDs	Power LEDs 1 Watt (B)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/5640-school-light-r102>

APPLICATION

Outdoor lighting

Standard flux : **518 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

MOUNTING TYPE

- Wall recessed
- Handrails

CARACTERISTICS

Weight : **300 g**

Eco Design

Options of luminous effects

- RGB options
- 20° deflected beam (option)
- Non adjustable
- Beam with various openings
- Transparent flat window
- Colour control system (optional)

Power supply - Control

Cable length: **0.2 m**

Material

- AL Anodised glazed aluminium
- PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

- IK10 Resists impacts up to 20 joules (IK10)
- IP67 Tight for temporary immersion

5640 SCHOOL-LIGHT

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5640-school-light-r102>

